

SEW



4-WIRE EARTH RESISTANCE TESTER

- Microprocessor-controlled with advanced safety features.
- 4-wire testing only.
- Automatic C spike check.
- Automatic P spike check.
- Auto power-off.
- Auto data hold.
- Large LCD display (2000 count).
- Protective terminal cover.


Earth resistance measurement with 4 wire testing and three resistance ranges:
0-20Ω, 0-200Ω, 0-2000Ω



 ALTAPRO

Model
2734 ER

+ Connection Diagram

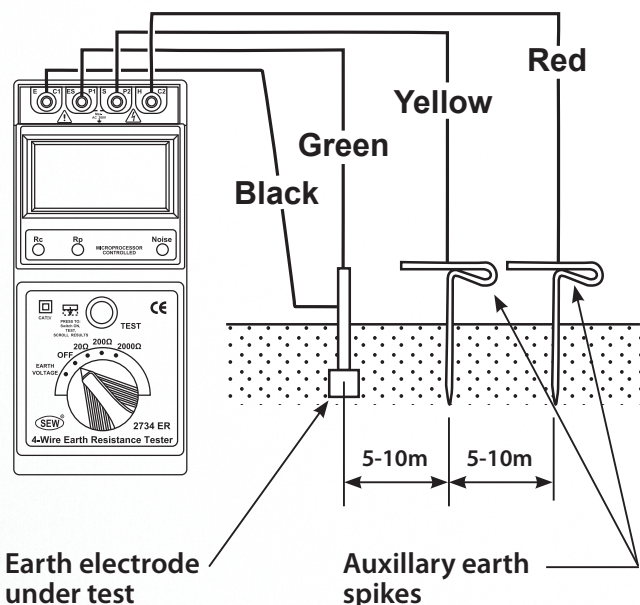

4-WIRE EARTH RESISTANCE TESTER

FEATURES

- Microprocessor-controlled with advanced safety features.
- 4-wire testing only.
- Automatic C spike check.
- Automatic P spike check.
- Auto power-off.
- Auto data hold.
- Large LCD display (2000 count).
- Protective terminal cover.

SPECIFICATIONS

Measuring Ranges	Earth Resistance: 0-20 Ω , 0-200 Ω , 0-2000 Ω
	Earth Voltage: 0-200V AC
Accuracy	Earth Resistance: $\pm 2\%rdg \pm 3dgt$
	Earth Voltage: $\pm 2\%rdg \pm 3dgt$
Earth Resistance Resolution	0-20 Ω : 0.01 Ω 0-200 Ω : 0.1 Ω 0-2000 Ω : 1 Ω
Temperature & Humidity	Operating: 0 $^{\circ}$ C~50 $^{\circ}$ C $\leq 80\%$ R.H. Storage: -10 $^{\circ}$ C~60 $^{\circ}$ C $\leq 80\%$ R.H.
Power Source	1.5V (AA) x 6
Dimensions	205(L) x 90(W) x 55(D)mm
Weight	Approx. 380g (battery included)
Safety Standards	EN 61010-1 CAT IV 200V EN 61326-1, EN 61557-1, EN 61557-5
Accessories	Test leads (red-15m, black-10m, yellow-10m, green-5m) Auxillary spike Carrying case Batteries Instruction Manual

+ Accessories

